



Wireless UHF transmitter, CP70C01, CP70C05, CP70C08

UHF key-Transmitter CP70C01



EAN-nr. 5703513013677

UHF hand-Transmitter CP70C08

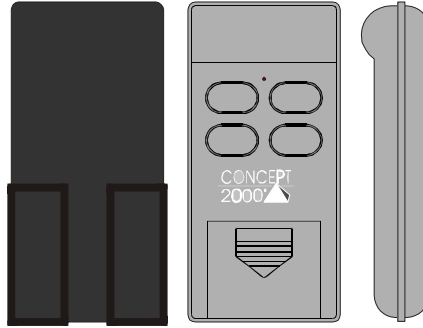


Wall holder EAN-nr. 5703513013677
EAN-nr. 5703513014353


CP70C08 are through the past delivered in two version:

- A black version, there only can read channel-codes from CP70C whit black antenna.
- A newer Light grey version witch can both read and send channel-code to CP70C whit blue antenna.

For further detail, se section: Code Learning

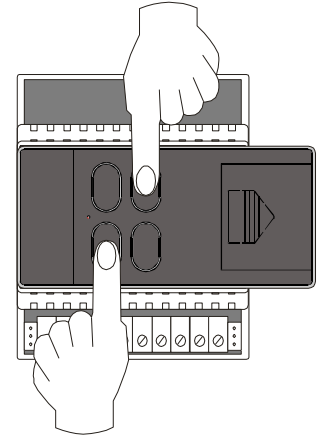

Read channel-code
Push bottom
A and D

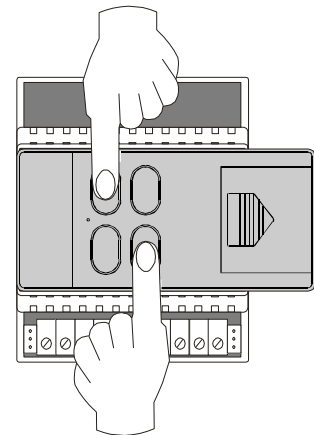

Send channel-code
Push bottom
B and C

Product description

CP70C01 Is a 1-Channel Key-transmitter For remote control of Concept 2000 systems. At the recent the CP70C01 only have 1-channel It's especially use't for turn ON/OFF the systems: all light ON/OFF, coming home light, goodnight,etc.

CP70C01 delivers with preprogramed UHF code, and can't be used at once. but it is possible to input new codes. Se section Code Learning.

Exchange battery: to exchange battery's, push the bottom whit the key-ring to the side.

Product description

CP70C08 Is a 8-Channel hand-transmitter For remote control of Concept 2000 systems. CP70C08 users for all kind of controls and all light ON/OFF, but also used to copy UHF codes from one transmitter to a other transmitter.

CP70C08 delivers with preprogramed UHF code, and can't be used at once. but it is possible to input new codes. Se section Code Learning.

Exchange battery: to exchange battery's, opening the cabinet bottom, push the cover down.

Technical data CP70C01

EAN.nr. 5703513013677

UHF-antenna: Built-in ferrite antenna
Transmitter fervency: 40,686Mhz.Quartzstabilize
Functions control: Lightdiode indicated
Channels: 1
Coding: Input 10...40 Bit
Operations Temperature: -15 to +80°C
Transmit range: Typical 30 meter
Modulation: A 1 modulate 28 bit Code
Transmit volume: < 1mW
Power consumption: < 20mA when transmit
Dimensions: 62 x 24 x 16 mm
Weights: Ca. 25g
Battery: 1x6 V (type CP 11A)

Technical data CP70C08


EAN.nr. 5703513013663

UHF-antenna: Built-in ferrite antenna
Transmitter fervency: 40,686Mhz.Quartzstabilize
Functions control: Lightdiode indicated
Channels: 8
Coding: Input 10...40 Bit
Operations Temperature: -15 to +80°C
Transmit range: Typical 30 meter
Modulation: A 1 D modulate 28 bit Code
Transmit volume: < 1mW
Power consumption: < 40mA when transmit
Dimensions: 90 x 24 x 19 mm
Weights: Ca. 25g
Battery: 2x12 V (type Mn 21)



Wireless UHF-transmitter, CP70C01, CP70C05, CP70C08

UHF wall mounted-Transmitter CP70C05

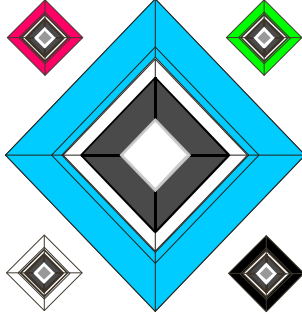

EAN-nr. 5703513013837

Product description

CP70C05 is a 5-Channel wall mounted-transmitter for remote control of Concept 2000 systems. CP70C05 users for all kind of controls and all light ON/OFF, but also used to copy UHF codes from one transmitter to a other transmitter.

CP70C05 delivers with preprogramed UHF code, and can't be used at once. but it is possible to input new codes.
Se section CodeLearning.

Exchange battery: to exchange battery's, your have to dismount the transmitter from wall.

CP70C05 can't be delivered in a 24 vdc for extern power supply. Whit's means, your don't have to change battery: CP70C06 EAN-nr.. 5703513013967

Technical data CP70C05

EAN-nr. 5703513013837

UHF-antenna:	Built-in ferrite antenna
Transmitter fervercy:	40,686Mhz.Quartzstabilize
Functions control:	Lightdiode indicated
Channels:	5
Coding:	Input 10...40 Bit
Operations Temperature:	-15 to +80°C
Transmit range:	Typical 30 meter
Modulation:	A 1 D modulate 28 bit Code
Transmit volume:	< 1mW
Power consumption:	< 20mA when transmit With out LED < 40mA when transmit Whit LED
Dimensions:	50 x 50 x 24 mm
Weights:	Ca. 36g
Battery:	1x6 V (type GP 11A)
Power supply (CP 2506):	24V DC(Type Cp11)

UHF-vægsender CP70C16



EAN-nr. 5703513034207

Product description

CP70C16 is a 16-channel UHF hand transmitter for remote control of CONCEPT 2000 system, users for all kind of controls and all light ON/OFF.
CP70C16 delivers with preprogramed UHF codes, and can be used at once. But it is possible to change codes.
Se section CodeLearning.

Exchange battery: To change battery remove the cover on backside with a screwdriver.

Technical data for CP 70C16

UHF-antenna:	Build-in ferrit antenna
Transmitter fervercy:	40,686 Mhz, quartzstabilize
Functions control:	LED indicated
Channels:	16
Coding:	input, 10 ... 40 Bit
Operations temperature:	-15 til +80°C
Transmit range:	Typisk 30 meter
Modulation:	A 1 D modulate 28 bit kode
Transmit volume:	< 1 mW
Power consumption:	< 40mA When transmit
Dimentionis (HxBxD):	142 x 75 x 24 mm
Weights:	ca. 36g
Battery for CP70C16	2x9 V (type 6LR61)

